

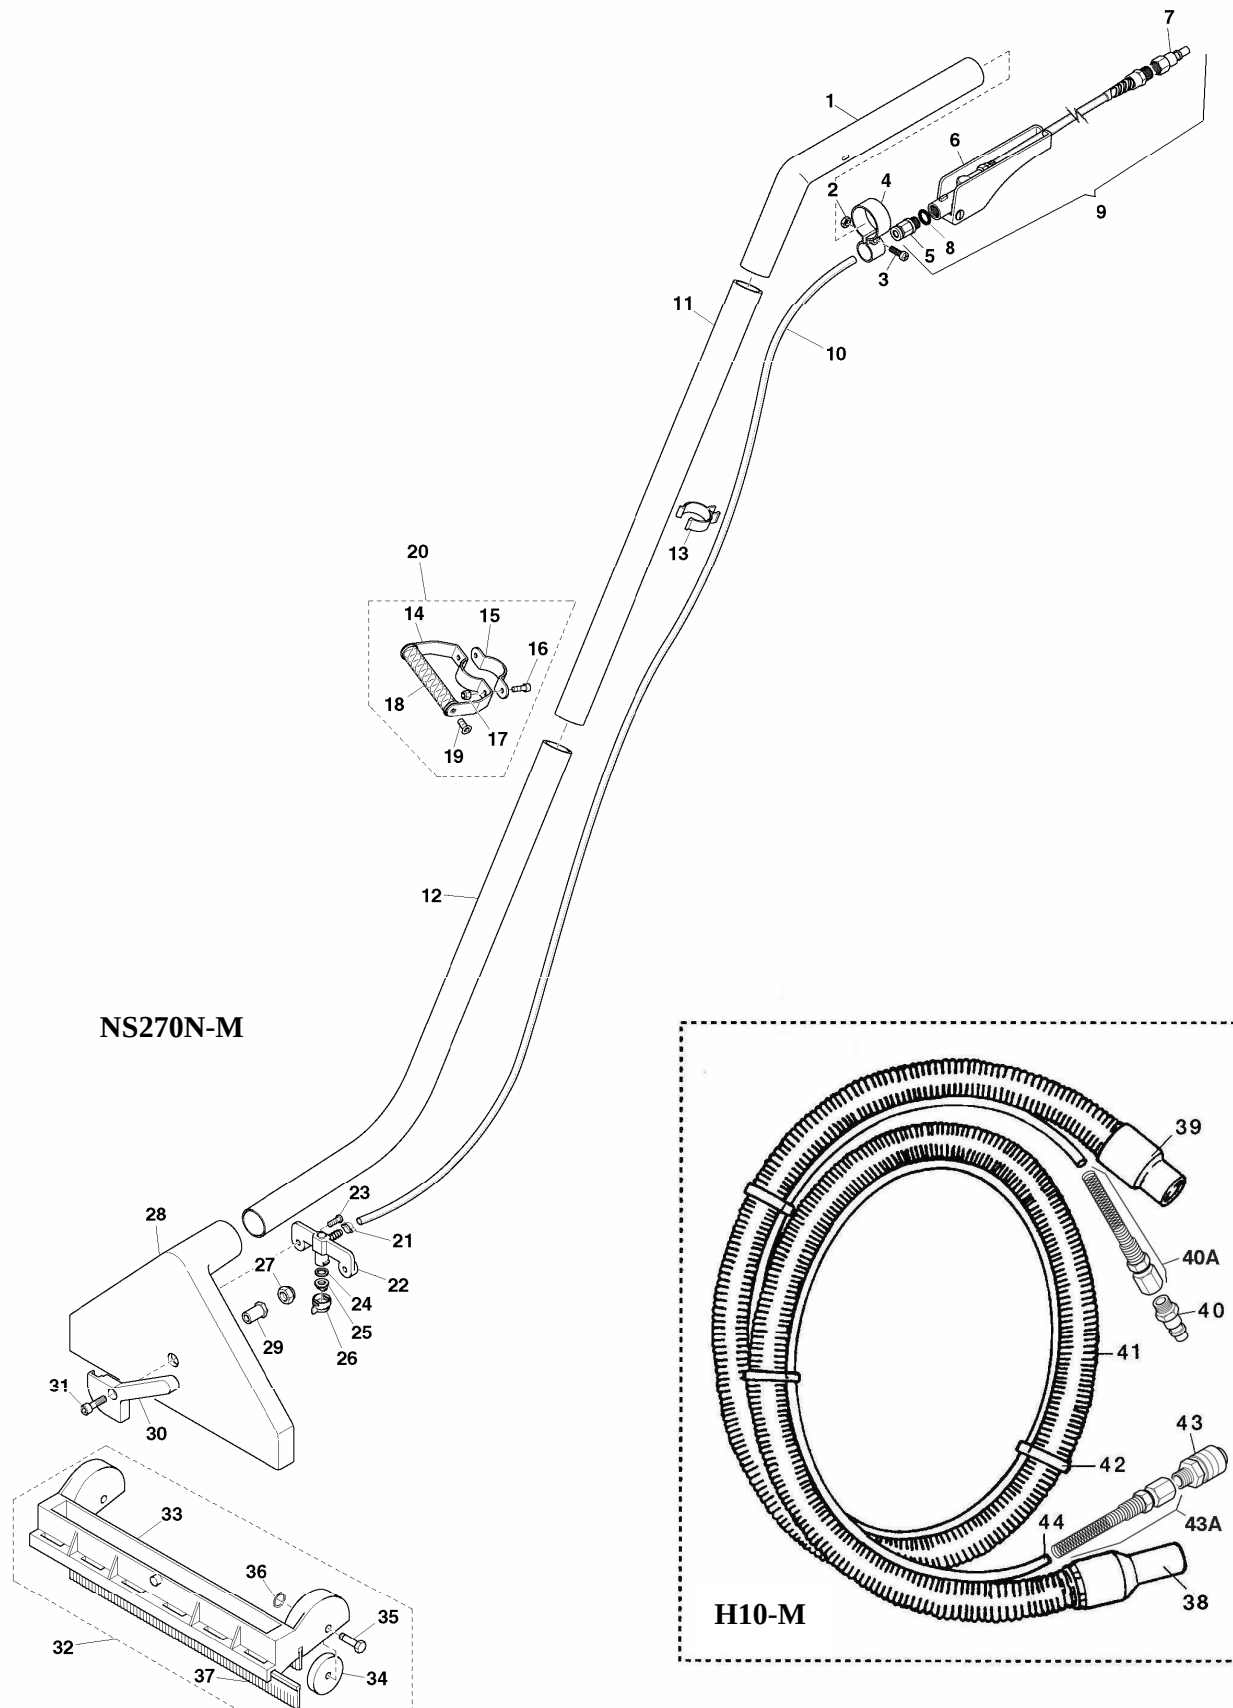


TABLE 21

rif	codice	description
1	306	HANDLE PLASTIC TUBE
2	525	NUT D.5
3	504	SCREW TC+ 5x20
4	319	VALVE LOCK
5	750	AUTOMATIC COUPLING D.8 – M.1/4
6	3200-INN	COMPLETE SOLUTION VALVE, WITHOUT COUPLINGS
7	689-PE	QUICK DISCONN. MALE – ATT. - F. ¼ - METAL
8	137	O-RING 1/4"
9	3200C-M	COMPLETE SOLUTION VALVE, METAL COUPLING
10	6151	EXTRAFLEX PIPE
11	350	STRAIGHT INOX TUBE D.36
12	305	CURVED INOX TUBE D.36
13	318	CLIP
14	117.1	UPPER PART FOR HANDLE
15	117.36	LOWER PART FOR HANDLE
16	574	SCREW – 6x14
17	562A	LOCKING NUT – DIAM. 6
18	117.3	CILINDRIC SUPPORT FOR HANDLE
	117.4	HANDLE GRIP
19	509	SCREW – 6x20
20	117C36	COMPLETE HANDLE (ITEMS FROM 14 TO 19)
21	543	LOCK BAND
22	7231	NOZZLE SUPPORT
23	536	SCREW TC+ 4x10 INOX
24	3209	O-RING 7,66 x 1,78
25	705-02	NOZZLE 02/110
26	7180	RING NUT FOR NOZZLE
27	568A	LOCKING NUT D.8
28	3081	ALUMINUM VACUUM HEAD
29	3082	BUSH
30	3083	LEVER
31	5092	SCREW – DIAM. 8
32	3084C	COMPLETE SLIDE (ITEMS FROM 33 TO 37)
33	3084	SLIDE BODY
34	3086	SLIDE WHEEL
35	3085	STUD
36	57808	SEEGER
37	3221	RUBBER STRIP
38	333	REVOLVING CUFF
39	332	CUFF
40	688-PE	QUICK DISCONNECT MALE, ATT. M.1/4" (METAL)
40A	6160	COUPLING + SPRING FOR 6/8 PIPE, AT. F. ¼" (METAL)
41	345	VACUUM HOSE
42	318	CLIP D.32-8
43	687-PE	QUICK DISCONNECT FEMALE, ATT. M.1/4" (METAL)
43A	6160	COUPLING + SPRING FOR 6/8 PIPE, ATT. F. ¼" (METAL)
44	710	EXTRAFLEX HOSE
	715-M	EXTRAFLEX PIPE+METAL COUPLINGS (40+40A+43+43A+44)
	715	EXTRAFLEX PIPE WITH PLASTIC COUPLINGS (40+43+44)