




The Pumps with Nine Lives

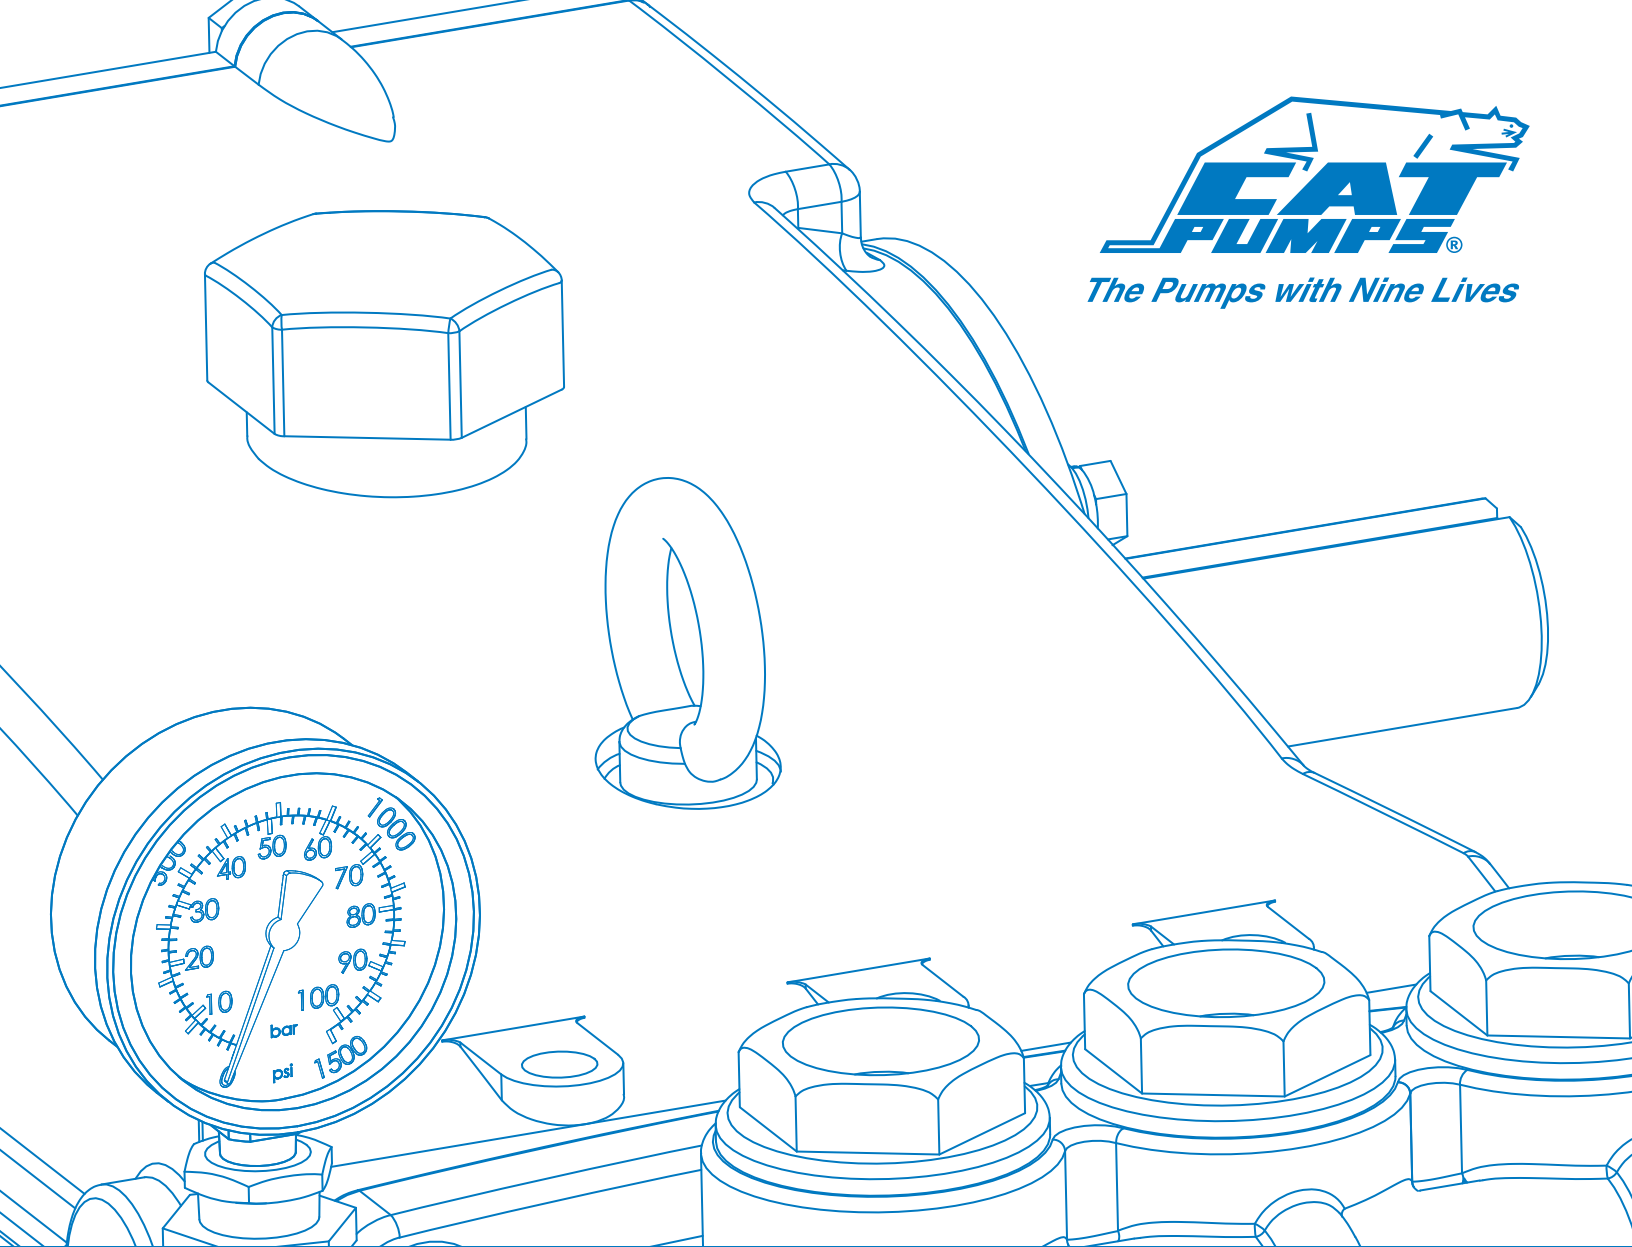

Pump Catalog

Value focused by exceeding expectations for quality, reliability and support.



Choose Cat Pumps and Build Your Bottom Line



Durability and Reliability Start Here

Cat Pumps' global mission is to exceed every customer's expectation for quality, reliability, product availability, delivery and technical support. For over four decades this mission has been the foundation of the company's ongoing success.

By providing proven, quality triplex positive displacement pumps, Cat Pumps has earned a reputation for exceptional product durability and reliability. Industries served include commercial cleaning, manufacturing, the process industries, government, military, vehicle cleaning, agriculture, food processing, the misting/cooling/fogging industry, plus many more. Customers select its pumps due to the low-life cycle cost, which provides exceptional value over the life of the system. In fact, Cat Pumps still has pumps running after more than three decades of reliable service. The organization continues to invest in new products and technologies to provide the innovation you have come to expect from Cat Pumps.



Product Performance Range:

A wide range of pump options are available, including a variety of products which meet various certifications and directives (i.e., ATEX).

- Flow: 0.13 to 240 gpm (.061 to 908 lpm)
- Pressure: 100 to 10,000 psi (7 to 689 bar)
- RPM: 100 to 3,450
- Liquid Temperature: -10° to 240°F (-23° to 116°C)
- Materials: Brass, Nickel Aluminum Bronze, 304 and 316 Stainless Steel, Duplex Stainless Steel
- Drives: Electric, Engine, Hydraulic, Pneumatic



Developing Strong Relationships

The customer has always been the foundation of Cat Pumps' business success and will continue to be in the years to come. Cat Pumps strives to meet the needs of its customers by doing one simple thing. Listening. Customers expect products that they buy to make a difference in their businesses, and as long as there are challenging pumping applications, there will be a commitment to supply products that answer the call to provide reliability, durability and value.

Today, Cat Pump's products are sold and serviced through hundreds of distributor partners worldwide. The emphasis on customer satisfaction is instilled on an international scale, so you will find them to be a trusted partner that pledges to provide world-class technical support and aftermarket service. Leverage the technical strength of a truly global team for your next high-pressure pumping application.



Cat Pumps is dedicated to high inventory levels at its Minneapolis and international branch locations. The Minneapolis location has a 99.7% fill rate with over 95% of orders shipped within 24 hours to U.S. and Canadian customers. Distributors stock pumps and parts locally, but also play a vital role in technical and service support.

Investing in our Products

Generating superior user confidence and providing outstanding value, Cat Pumps built its reputation on the dependability and reliability of its products. A comprehensive distributor network locally stocks pumps, repair kits and accessories. They will be happy to help you with pump selection and system design requirements.



Manifold Design

- Precision machined high-strength forged manifolds provide a superior sealing surface for consistently longer seal life when compared to competitive designs.
- Proprietary seal materials and designs offer unmatched performance, often providing two to three times longer seal life than competitors' pumps.
- A variety of optional seals/elastomers are available to handle special applications.
- Manifolds are available in different materials, meeting the requirements needed for various liquids.
- Stainless steel valves, seats and springs provide corrosive-resistant performance and extended service life.



Drive Design

- Drive components are designed to meet continuous-duty industrial applications, consistently out performing competitor's designs.
- Proprietary ceramic plungers provide maximum resistance to corrosion and abrasion, maximizing seal life and outperforming all others.
- Heavy Duty ball and roller bearings provide long life without repair.
- Hardened crankshafts and connecting rods are sized to minimize surface speed at the journal, contributing to lower temperature operation and longer drive life.

Industry Leading Customer Service

Cat Pumps knowledgeable and experienced customer service team provides assistance with order information as well as technical assistance in product selection, installation, maintenance support, pump repair and general system troubleshooting.

Live support available M – F, 7:30 a.m. to 5:00 p.m. CST at 763-780-5440.



Product Ordering

Using This Catalog

The plunger and piston pump sections of this catalog are organized by manifold material and flow rate range. Each pump chart has a column titled "Pump Model." The model number in this column represents the standard pump model offering equipped with Buna seals and O-rings.

Standard Buna pump seals and/or O-rings can be changed. Other seal materials will be listed in the "Optional Seals" column of the pump charts. You will need to add a suffix to the standard model number that represents your desired new seal material.

Optional Seal and O-Ring Configurations

MATERIAL CODE	DESCRIPTION	PUMP MODEL SUFFIX
FPM	Fluorocarbon (Viton®) seals and O-rings	.0110
	Fluorocarbon (Viton®) seals only	.0100
PTFE	Pure Polytetrafluoroethylene (Teflon®) seals and Buna O-rings	.0700
	Pure Polytetrafluoroethylene (Teflon®) seals and FPM O-rings	.0710
IPFE	Pure Polytetrafluoroethylene (Teflon®) seals and Isolast O-rings	.0770
EPDM	Ethylene Propylene Diene Monomer seals and O-rings	.0220
NBRS	Buna-N silicone free seals and O-rings	.6000
STHT	Special Teflon® high temperature low and high pressure seals	.3400
HT	High temperature seal for plunger pump high pressure seals	.3000
	High temperature V-HOT cup for piston pumps	.3000
BNG	Blue-dot (non-greased) Buna-N seals with wicks for piston pumps	.0300
ST4	Special Teflon® high temperature low and high pressure seals with FPM O-rings for 240°F operation.	.4410

Viton® and Teflon® are registered trademarks of DuPont Dow Elastomers.

Example

Pump model 3535 can be changed from Buna to either FPM or EPDM. To convert pump model 3535 from Buna seals and O-rings to FPM (Viton®), you would add the suffix (.0110) to the standard pump model number (3535.0110). Use this new number when ordering the pump.

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	DRIVES	OPTIONAL ¹ SEALS
	GPM	LPM	PSI	BAR	HP	KW			
BRASS MANIFOLDS WITH BUNA SEALS 6.7 TO 75 GPM (25 TO 284 LPM)									
Note: Models ending in the letter "C" or "K" are flush style pumps. Pumps in italics indicate an optional performance rating. * Intermittent Duty Only.									
3560	25	95	3000	210	51.4	38.3	1450	Belt	FPM
3535	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM
3535C	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

Cat Pumps configures a number of pumps for special applications and certifications (i.e., ATEX, CO2, others).

Please contact Cat Pumps directly (763-780-5440).

Plunger Pumps

316 STAINLESS STEEL MANIFOLDS



2SF25SEEL



271
(Rails and shaft protector sold separately)



781
(Rails sold separately)

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	DRIVES	OPTIONAL SEALS
	GPM	LPM	PSI	BAR	HP	KW			
316 STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 0.5 TO 6 GPM (1.9 TO 23 LPM)									
Note: Models ending in the letter "C" or "K" are flush style pumps.									
2SF05SEEL	0.5	1.9	1200	85	0.4	0.3	1725	Hollow shaft-electric	FPM, EPDM, IPFE
2SF10SEEL	1	3.8	1200	85	0.8	0.6	1725	Hollow shaft-electric	FPM, EPDM, IPFE
2SF15SEEL	1.5	5.7	1200	85	1.2	0.9	1725	Hollow shaft-electric	FPM, EPDM, IPFE
2SF22SEEL	2.2	8.3	1200	85	1.8	1.3	1725	Hollow shaft-electric	FPM, EPDM, IPFE
231	2.3	8.7	1500	105	2.4	1.8	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, STHT, HT
3CP1231	2.3	8.7	2000	140	3.2	2.4	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, HT, ST4
2SF25SEEL	2.5	9.5	1200	85	2.1	1.5	1725	Hollow shaft-electric	FPM, EPDM, IPFE
2SF29SEEL	2.85	10.8	1200	85	2.3	1.7	1725	Hollow shaft-electric	FPM, EPDM, IPFE
2SF35SEEL	3.5	13.2	1200	85	2.9	2.1	1725	Hollow shaft-electric	FPM, EPDM, IPFE
271	3.5	13.2	1500	105	3.6	2.7	1420	Belt, Bell, Clutch	FPM, EPDM, IPFE, STHT, HT
241	3.6	13.6	1200	85	3	2.2	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, STHT, HT
3CP1241	3.6	13.6	2000	140	4.9	3.7	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, HT, ST4
341	4	15	1800	125	5	3.7	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, HT
5CP6241CS	4	15	2000	140	5.5	4.1	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, HT, ST4
311	4	15	2200	155	6	4.5	950	Belt, Clutch	FPM, EPDM, IPFE, HT
311C	4	15	2200	155	6	4.5	950	Belt, Clutch	FPM, EPDM, IPFE, HT
2SF42SEEL	4.2	15.9	1000	70	2.9	2.1	1725	Hollow shaft-electric	FPM, EPDM, IPFE
3CP1221	4.2	15.9	2000	140	5.8	4.3	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, HT, ST4
781	4.5	17	5000	345	15.4	11.5	1700	Belt, Clutch	FPM, EPDM, IPFE, PTFE
781K	4.5	17	5000	345	15.4	11.5	1700	Belt, Clutch	FPM, EPDM, IPFE, PTFE
351	5	19	1500	105	5.1	3.8	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, IPFE, HT
5CP6251	5	19	2000	140	6.8	5.1	1725	Solid shaft, Belt, Bell, Clutch	FPM, EPDM, HT, ST4
5CP6221	6	23	2000	140	8.2	6.1	1400	Belt, Clutch	FPM, EPDM, HT, ST4

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

“The rugged durability of Cat Pumps can withstand the corrosive environment in which they are subjected and they have proven to be true workhorses in the desalination field.”

Plunger Pumps

316 STAINLESS STEEL MANIFOLDS



1051
(Rails and shaft protector sold separately)



1541
(Rails and shaft protector sold separately)



7CP6111
(Rails sold separately)

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	DRIVES	OPTIONAL SEALS
	GPM	LPM	PSI	BAR	HP	KW			
316 STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 9 TO 21 GPM (34 TO 79 LPM)									
Note: Models ending in the letter "C" or "K" are flush style pumps. Pumps in <i>italics</i> indicate an optional performance rating.									
3801	9	34	5000	345	30.8	23	824	Belt	FPM, EPDM
3801K	9	34	5000	345	30.8	23	824	Belt	FPM, EPDM
7CP6111G1	10	38	2000	140	13.7	10.2	1667	Gearbox	FPM, EPDM, STHT
1051	10	38	2200	155	15.1	11.3	958	Belt, Clutch	FPM, EPDM, STHT, NBRS, IPFE, ST4, PTFE
1051C	10	38	2200	155	15.1	11.3	958	Belt, Clutch	FPM, EPDM, STHT, NBRS, IPFE, ST4, PTFE
1861	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
1861K	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
7CP6111	10.5	40	2000	140	14.4	10.7	1725	Belt, Bell, Clutch	FPM, EPDM, STHT
7CP6171	10.5	40	2000	140	14.4	10.7	1450	Belt, Clutch	FPM, EPDM, STHT
<i>1051</i>	<i>12</i>	<i>45</i>	<i>1800</i>	<i>125</i>	<i>14.8</i>	<i>11</i>	<i>1150</i>	<i>Belt, Clutch</i>	<i>FPM, EPDM, STHT, IPFE, ST4 PTFE</i>
3811	14	53	3000	210	28.8	21.5	800	Belt	FPM, EPDM, IPFE
3811K	14	53	3000	210	28.8	21.5	800	Belt	FPM, EPDM, IPFE
6811	15	57	5000	345	51.5	38.4	600	Belt	FPM, EPDM, IPFE
6811K	15	57	5000	345	51.5	38.4	600	Belt	FPM, EPDM, IPFE
6801	15	57	7000	485	51.5	38.4	600	Belt	FPM, EPDM
6801K	15	57	7000	485	51.5	38.4	600	Belt	FPM, EPDM
1531	15.6	59	1500	105	16	11.9	1450	Belt, Clutch	FPM, EPDM, IPFE
1541	18	68	1200	85	14.7	11	1100	Belt, Clutch	ST4
2511	20	76	1500	105	20.6	15.4	1450	Belt	FPM, STHT, IPFE
2531	21	79	1200	85	17.3	12.9	860	Belt	FPM, EPDM, IPFE, ST4
2831	21	79	1200	85	17.3	12.9	860	Belt	FPM, EPDM
2831K	21	79	1200	85	17.3	12.9	860	Belt	FPM, EPDM

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.



Need more detail?

Find Product Data Sheets online at catpumps.com



2531
(Rails and shaft protector sold separately)



3531
(Rails sold separately)



6841

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER			RPM	DRIVES	OPTIONAL ¹ SEALS
	GPM	LPM	PSI	BAR	HP	KW				
316 STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 23 TO 75 GPM (87 TO 284 LPM)										
Note: Models ending in the letter "C" or "K" are flush style pumps. * Intermittent Duty Only.										
3521	23	87	2000	140	31.6	23.6	800	Belt	FPM, EPDM, IPFE	
3521C	23	87	2000	140	31.6	23.6	800	Belt	FPM, EPDM, IPFE	
3821	23	87	2000	140	31.6	23.6	800	Belt	FPM, EPDM	
3821K	23	87	2000	140	31.6	23.6	800	Belt	FPM, EPDM	
2531	25	95	1000	70	17.1	12.8	1025	Belt	FPM, EPDM, IPFE, ST4	
6821	25	95	3000	210	51.4	38.3	615	Belt	FPM, EPDM	
6821K	25	95	3000	210	51.4	38.3	615	Belt	FPM, EPDM	
3531	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM, IPFE	
3531C	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM, IPFE	
3831	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM, IPFE	
3831K	36	136	1200	85	29.7	22.1	800	Belt	FPM, EPDM, IPFE	
3531HS*	40	151	1750	121	47.9	35.8	888	Belt	FPM, EPDM, IPFE	
6831	40	151	2300	160	63	47	625	Belt	FPM	
6831K	40	151	2300	160	63	47	625	Belt	FPM	
3541	45	170	1000	70	30.9	23.0	765	Belt	FPM, EPDM, IPFE	
3541C	45	170	1000	70	30.9	23.0	765	Belt	FPM, EPDM, IPFE	
3841	45	170	1000	70	30.9	23.0	765	Belt	FPM, EPDM, IPFE	
3841K	45	170	1000	70	30.9	23.0	765	Belt	FPM, EPDM, IPFE	
6841	48	182	2000	140	65.8	49.1	615	Belt	FPM, EPDM	
6841K	48	182	2000	140	65.8	49.1	615	Belt	FPM, EPDM	
6761	60	227	1200	85	49.4	36.8	520	Belt	FPM, EPDM	
6861	60	227	1200	85	49.3	36.8	520	Belt	FPM	
6861K	60	227	1200	85	49.3	36.8	520	Belt	FPM	
6771	75	284	1200	85	61.6	45.9	650	Belt	FPM, EPDM	

304 STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 3 GPM (11 LPM)

1810	3	11	10,000	690	20.5	15.3	1500	Belt	Contact Cat Pumps
1810K	3	11	10,000	690	20.5	15.3	1500	Belt	Contact Cat Pumps

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

Plunger Pumps

DUPLEX STAINLESS STEEL MANIFOLDS



3511
(Rails sold separately)



6762



152R100

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	DRIVES	OPTIONAL ¹ SEALS
	GPM	LPM	PSI	BAR	HP	KW			
DUPLEX STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 9 TO 240 GPM (34 TO 908 LPM)									
Note: Models ending in the letter "C" or "K" are flush style pumps.									
3501	9	34	5000	345	30.8	23.0	824	Belt	FPM
3501C	9	34	5000	345	30.8	23.0	824	Belt	FPM
1051D	10	38	2200	155	15.1	11.3	958	Belt, Clutch	FPM, EPDM, STHT, NBRS, IPFE, ST4, PTFE
661C	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
661D	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
3511	14	53	3000	210	28.8	21.5	800	Belt	FPM, IPFE
3511C	14	53	3000	210	28.8	21.5	800	Belt	FPM, IPFE
3822	23	87	2000	140	31.6	23.6	800	Belt	Contact Cat Pumps
3832	36	136	1200	85	29.7	22.1	800	Belt	Contact Cat Pumps
6762	60	227	1200	85	49.4	36.8	520	Belt	FPM
6862	60	227	1200	85	49.3	36.8	520	Belt	Contact Cat Pumps
6864	60	227	1200	85	49.3	36.8	520	Belt	Contact Cat Pumps
157R060	100	379	2700	190	184.9	138	310	Belt	FPM
152R060	115	435	1200	85	94.5	70	360	Belt	FPM
152R060C	115	435	1200	85	94.5	70.5	360	Belt	FPM
152R080	200	757	1200	85	164.4	122.6	355	Belt	FPM, EPDM
152R080C	200	757	1200	85	164.4	122.6	355	Belt	FPM, EPDM
157R080	200	757	1560	108	213.7	159.4	355	Belt	FPM
152R100	240	908	1000	70	164.4	122.6	270	Belt	FPM
152R100C	240	908	1000	70	164.4	122.6	270	Belt	FPM

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

“In our business, downtime means delays and lost productivity. We use only Cat Pumps on all of our cleaning equipment because in our business, reliability and dependability are the keys to our success.”

Chris Keating • Power Clean

Piston Pumps

BRASS AND STAINLESS STEEL MANIFOLDS



280
(Rails and shaft protector sold separately)



820
(Rails and shaft protector sold separately)



2520
(Rails and shaft protector sold separately)

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	OPTIONAL ¹ SEALS
	GPM	LPM	PSI	BAR	HP	KW		
BRASS MANIFOLDS WITH BUNA SEALS 3 TO 60 GPM (11.4 TO 227 LPM)								
Note: Models ending in the letter "C" or "K" are flush style pumps.								
280	3	11.4	1000	70	2.1	1.6	1330	FPM, PTFE, HT
290	3.5	13.2	1200	85	2.9	2.2	1200	FPM, PTFE, HT
333	4	15	1200	85	3.3	2.5	1070	FPM, PTFE, BNG, HT
430	5	19	1000	70	3.4	2.5	1040	FPM, PTFE, BNG, HT
323	5	19	1500	105	5.1	3.8	1000	FPM, BNG
623	6	23	1200	85	4.9	3.7	850	FPM, BNG, HT
820	10	38	1000	70	6.9	5.1	940	FPM, BNG, HT
390	12	45	600	40	4.9	3.7	1200	FPM, HT
1010	13	49	700	50	6.2	4.6	900	FPM, BNG, HT
2520	25	95	800	55	13.7	10.2	772	FPM, HT
2520C	25	95	800	55	13.7	10.2	772	FPM, HT
6040	40	151	1500	105	41.1	30.6	500	FPM
6020	60	227	1000	70	41.1	30.6	500	FPM, PTFE

316 STAINLESS STEEL MANIFOLD WITH BUNA SEALS 3 TO 60 GPM (11.4 TO 227 LPM)

Note: Internal components are chrome plated 304 stainless steel.

281	3	11.4	1000	70	2.1	1.6	1330	FPM, PTFE, HT
291	3.5	13.2	1200	85	2.9	2.2	1200	FPM, PTFE, HT
331	4	15	1200	85	3.3	2.5	1070	FPM, PTFE, BNG, HT
431	5	19	1000	70	3.4	2.5	1040	FPM, PTFE, BNG, HT
621	6	23	1200	85	4.9	3.7	850	FPM, BNG, HT
821	10	38	1000	70	6.9	5.1	940	FPM, BNG, HT
1011	13	49	700	50	6.2	4.6	900	FPM, BNG, HT
2521	25	95	800	55	13.7	10.2	772	FPM, HT
6041	40	151	1500	105	41.1	30.6	500	FPM
6021	60	227	1000	70	41.1	30.6	500	FPM, PTFE

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

Need more detail?

Find Product Data Sheets online at catpumps.com

Plunger Pumps

DUPLEX STAINLESS STEEL MANIFOLDS



3511
(Rails sold separately)



6762



152R100

PUMP MODEL	MAXIMUM FLOW		MAXIMUM PRESSURE		HORSEPOWER		RPM	DRIVES	OPTIONAL ¹ SEALS
	GPM	LPM	PSI	BAR	HP	KW			
DUPLEX STAINLESS STEEL MANIFOLDS WITH BUNA SEALS 9 TO 240 GPM (34 TO 908 LPM)									
Note: Models ending in the letter "C" or "K" are flush style pumps.									
3501	9	34	5000	345	30.8	23.0	824	Belt	FPM
3501C	9	34	5000	345	30.8	23.0	824	Belt	FPM
1051D	10	38	2200	155	15.1	11.3	958	Belt, Clutch	FPM, EPDM, STHT, NBRs, IPFE, ST4, PTFE
661C	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
661D	10	38	3000	210	20.6	15.4	1429	Belt, Clutch	FPM, EPDM, IPFE
3511	14	53	3000	210	28.8	21.5	800	Belt	FPM, IPFE
3511C	14	53	3000	210	28.8	21.5	800	Belt	FPM, IPFE
3822	23	87	2000	140	31.6	23.6	800	Belt	Contact Cat Pumps
3832	36	136	1200	85	29.7	22.1	800	Belt	Contact Cat Pumps
6762	60	227	1200	85	49.4	36.8	520	Belt	FPM
6862	60	227	1200	85	49.3	36.8	520	Belt	Contact Cat Pumps
6864	60	227	1200	85	49.3	36.8	520	Belt	Contact Cat Pumps
157R060	100	379	2700	190	184.9	138	310	Belt	FPM
152R060	115	435	1200	85	94.5	70	360	Belt	FPM
152R060C	115	435	1200	85	94.5	70.5	360	Belt	FPM
152R080	200	757	1200	85	164.4	122.6	355	Belt	FPM, EPDM
152R080C	200	757	1200	85	164.4	122.6	355	Belt	FPM, EPDM
157R080	200	757	1560	108	213.7	159.4	355	Belt	FPM
152R100	240	908	1000	70	164.4	122.6	270	Belt	FPM
152R100C	240	908	1000	70	164.4	122.6	270	Belt	FPM

¹ Selection of an optional seal requires a suffix addition to the base model number. For more information see page 5.

“In our business, downtime means delays and lost productivity. We use only Cat Pumps on all of our cleaning equipment because in our business, reliability and dependability are the keys to our success.”

Chris Keating • Power Clean

Accessories


ENSURING MAXIMUM PUMP PERFORMANCE



Demand Genuine Cat Pump Accessories

Cat Pumps offers a wide range of accessories, with all adhering to the same exacting standards as its pumps. A pumping system's ongoing performance is as good as its weakest component, which is why accessory components are rigorously tested and evaluated. The goal is to provide the best system value by offering pumps and accessories that exceed your performance and reliability expectations, helping you realize the lowest possible life cycle cost.

Accessories are listed in brochures grouped by the pumping system function; pump outlet controls, pump inlet controls, belt drive, direct drive, operator and specialty controls. All can be downloaded from catpumps.com. Inlet and discharge hoses, by-pass hose assemblies and fittings are available and can be found in dedicated product data sheets at catpumps.com.



Check out our complete line of accessories
online at catpumps.com

Custom Pumping Systems

YOU DEFINE. WE DESIGN AND DELIVER.



Custom Engineered to Meet your Application Demands



For over 25 years, Cat Pumps has been the industry leader in providing customers with quality custom-engineered pumping systems to meet a ever-widening range of application needs. By selecting Cat Pumps for your next pumping system, you can eliminate the hassle and expense of designing, multiple source buying, fabrication and testing. The knowledgeable and helpful technical sales team will assist you with proper component selection as well as installation, operation and maintenance support.

All systems are designed, built and pressure tested in Cat Pumps' Minneapolis location, and typically ship in two to eight weeks. To begin the quoting process, call our main office at 763-780-5440, or submit our custom system quote form at catpumps.com.

With thousands of installations running around the world, choose Cat Pumps for your next custom pumping system.

Call or go online to start your quote today.



System Configuration

Cat Pumps' skilled technical sales staff has extensive experience in hundreds of applications and will work with you to determine the best configuration for your application. A wide variety of options are offered to fit any installation.

Base

System design starts with choosing the base that best fits your application. Numerous base configurations are available to meet space, portability, sound and material demands.

- Standard • Vertically Stacked • Portable • Enclosed • Multiple Pump

Power Source

Evaluate which power source will best fit the needs of your installation. A qualified and proven staff with extensive experience can assist in recommending the correct product for any power source available.

- Electric • Gas • Diesel • Hydraulic • Pneumatic

Drive Package

A wide variety of drive packages are available to compliment your power source of choice.

- Belt • Direct Drive • Gearbox • Flex Coupling/Bell Housing • Clutch

Accessories

Choose from hundreds of high-quality genuine Cat Pumps accessories to ensure optimum system performance and life.

- Regulator • Unloader • Relief / Pop-off Valve • Pressure Gauge
- Pulsation Dampener • Captive Acceleration Tube (C.A.T.)
- Inlet Filter / Strainer • Guns • Oil



Advanced Control Options



Ask about Cat Pumps' wide variety of advanced control options which is designed to help ensure maximum system performance, as well as provide maximum system protection. Some options include:

- Variable Frequency Drives
- PID Loop (varies speed of pump to maintain system pressure)
- Multiple Pump Systems
- Low-Pressure Seal Monitors
- Auto Shutdowns (Temperature and Low Inlet Pressure)

Other control options to suit your application needs are available upon request.